

09/530694

529 Rec'd PCT/PTO

04 MAY 2000

LAW OFFICES

SUGHRUE, MION, ZINN, MACPEAK & SEAS, PLLC

2100 PENNSYLVANIA AVENUE, N.W.
WASHINGTON, D.C. 20037-3202
TELEPHONE (202) 293-7060
FACSIMILE (202) 293-7860

May 4, 2000

**CALIFORNIA OFFICE**

1010 EL CAMINO REAL
MENLO PARK, CA 94025
TELEPHONE (650) 325-5800
FACSIMILE (650) 325-6606

ATTN: BOX PCT
Assistant Commissioner for Patents
Washington, D.C. 20231

JAPAN OFFICE

TOEI NISHI SHIMBASHI BLDG. 4F
13-5 NISHI SHIMBASHI 1-CHOME
MINATO-KU, TOKYO 105, JAPAN
TELEPHONE (03) 3503-3760
FACSIMILE (03) 3503-3756

ATTN: BOX PCT

Re: Application of Noriyuki N. Akira KAWAKAMI and Hideya YAMADA
SEMI-HARD MAGNETIC MARKER, METHOD OF PRODUCING SAME, AND MAGNETIC MARKER USING SAME
Our Reference: Q58984
PCT/JP99/04926, filed September 10, 1999

Dear Sir:

Applicants herewith submit the attached papers for the purpose of entering the National stage under 35 U.S.C. § 371 and in accordance with Chapter I of the Patent Cooperation Treaty. Attached hereto is the application identified above which is a translation of **PCT International Application No. PCT/JP99/04926, filed September 10, 1999**, comprising the specification, claims, eight (8) sheets of drawings, Petition for Acceptance of Black and White Photographs under 37 C.F.R. § 1.84, executed Declaration and Power of Attorney, Preliminary Amendment, Notification Concerning Submission of Priority Document, International Search Report, Information Disclosure Statement, PTO Form 1449 with references, executed Assignment and PTO Form 1595.

The Government filing fee is calculated as follows:

Total Claims	9 - 20 =	0 x \$18 =	\$ 000.00
Independent Claims	2 - 3 =	0 x \$78 =	\$ 000.00
Base Filing Fee	(\$840.00)		\$ 840.00
Multiple Dep. Claim Fee	(\$260.00)		\$ 260.00
TOTAL FILING FEE			\$1,100.00
Recordation of Assignment Fee			\$ 40.00
Petition Fee for Submission of Photographs			\$ 130.00
TOTAL U.S. GOVERNMENT FEE			\$1,270.00

Checks for the statutory filing fee of \$ 1,100.00, Petition Fee of \$130.00 and Assignment recordation fee of \$ 40.00 are attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. 1.492; 1.16 and 1.17 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from:

Japanese Patent Application

10-257180

Filing Date

September 10, 1998

The Office is invited to contact the above firm on any question which might arise on the above-named application. Any contact that the Office might need to make should be directed to Thomas J. Macpeak, Registration No. 19,292, at (202)293-7060.

Respectfully submitted,
SUGHRUE, MION, ZINN, MACPEAK & SEAS
Attorneys for Applicant(s)

By

Waddell A. Biggart

Registration No. 24,861

WAB:amt

SCAN 12

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

526 Rec'd PCT/PTO 04 MAY 2000

In re Patent Application of

Noriyuki NAKAOKA, Akira KAWAKAMI and Hideya YAMADA

Serial No.: NOT YET ASSIGNED

PCT/JP99/04926, filed September 10, 1999

Filed: May 4, 2000

For: SEMI-HARD MAGNETIC MATERIAL, METHOD OF PRODUCING SAME, AND MAGNETIC MARKER USING SAME

PRELIMINARY AMENDMENTATTN: BOX PCT
Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Prior to examination of the above-identified application, please amend the above-mentioned application as follows:

IN THE SPECIFICATION:

Page 6, line 10, please delete "Fig.3 is a photograph" and insert therefor --Fig.3(A) through 3(D) are photographs--;

line 13, please delete "Fig.4 is a photograph" and insert therefor --Fig.4(A) through 4(C) are photographs--;

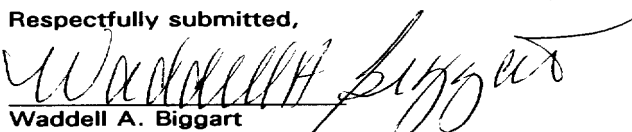
line 15, please delete "Fig.5 is a photograph" and insert therefor --Fig.5(A) through 5(C) are photographs--.

REMARKS

The above amendments are made to correct the designation of the Figures in the brief description of the drawings so that the brief description conforms correctly to the drawings.

Applicants submit no questions of new matter should arise and entry is requested.

Respectfully submitted,


Waddell A. Biggart
Registration No. 24,861SUGHRUE, MION, ZINN, MACPEAK & SEAS
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3202
Tel: (202) 293-7060
WAB:amt
Q58984
Date: May 4, 2000

SCAN 12

SPECIFICATION

SEMI-HARD MAGNETIC MATERIAL, METHOD OF PRODUCING SAME,
AND MAGNETIC MARKER USING SAME

TECHNICAL FIELD

The invention relates to a semi-hard magnetic material used for relays and bias materials of a magnetic marker, a method of producing the semi-hard magnetic material, and a magnetic marker using the semi-hard magnetic material.

A semi-hard magnetic material which can maintain a magnetizing state and which can also perform the demagnetization thereof has been used as a material for relays. As a representative semi-hard material, there is known such a Fe-Cr-Co based alloy and etc. as disclosed in JP-B-51-18884.

As regards the semi-hard magnetic material, there have been proposed various alloys other than the above Fe-Cr-Co based alloy, in view of required, various magnetic characteristics such as coercivity, saturation magnetic flux density and etc.

Further, regarding the use of the semi-hard magnetic material, it is possible to utilize it for producing such a bias element for a magnetic marker as to be used for monitoring articles, as disclosed in JP-A-8-82285. This bias element is combined with a magnetostriction element made of an amorphous magnetic

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

526 Rec'd PCT/PTO 04 MAY 2000

In re Patent Application of

Noriyuki NAKAOKA, Akira KAWAKAMI and Hideya YAMADA

Serial No.: NOT YET ASSIGNED

PCT/JP99/04926, filed September 10, 1999

Filed: May 4, 2000

For: SEMI-HARD MAGNETIC MATERIAL, METHOD OF PRODUCING SAME, AND MAGNETIC MARKER USING SAME

PRELIMINARY AMENDMENTATTN: BOX PCT
Assistant Commissioner for Patents
Washington, DC 20231

Sir:

Prior to examination of the above-identified application, please amend the above-mentioned application as follows:

IN THE SPECIFICATION:

Page 6, line 10, please delete "Fig.3 is a photograph" and insert therefor --Fig.3(A) through 3(D) are photographs--;

line 13, please delete "Fig.4 is a photograph" and insert therefor --Fig.4(A) through 4(C) are photographs--;

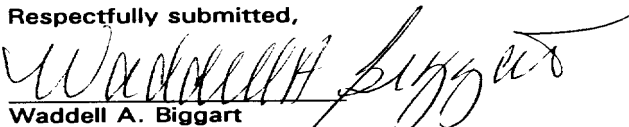
line 15, please delete "Fig.5 is a photograph" and insert therefor --Fig.5(A) through 5(C) are photographs--.

REMARKS

The above amendments are made to correct the designation of the Figures in the brief description of the drawings so that the brief description conforms correctly to the drawings.

Applicants submit no questions of new matter should arise and entry is requested.

Respectfully submitted,


Waddell A. Biggart
Registration No. 24,861SUGHRUE, MION, ZINN, MACPEAK & SEAS
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3202
Tel: (202) 293-7060
WAB:amt
Q58984
Date: May 4, 2000

material etc. so that it may be used to regulate
magnetostrictive vibration.

5 A semi-hard magnetic material used as a bias
material for relays or magnetic markers is required to
have easiness of regulating coercivity, high saturation
magnetic flux density, and clearness of the on-off of a
magnetizing state and another demagnetizing state.

10 The respect that the material has the
clearness of the on-off means that it is possible to
observe that the semi-hard material has a rectangular
hysteresis loop and a squarish corner regarding each
quadrant of the B-H curve with the result that the shape
of the B-H curve is similar to or approaches a rectangle
(, which is called below "magnetization steepness").
15 The respect that the corner is squarish means that, in a
magnetic material, the displacement of domain walls and
the rotation of magnetic domains occur simultaneously by
an applied magnetic field of a predetermined intensity.

20 As one of the semi-hard materials, the present
inventors have found out a Fe-Cu based alloy which is
separated into two phases because these two elements are
low each other in solid-solubility. The Fe-Cu based
alloy is known to have easiness regarding the regulating
of coercivity by adjusting the amount of a non-magnetic
25 Cu phase to be dispersed in a matrix containing as the
main constituent thereof Fe with magnetism.

However, in a case of actually producing the
semi-hard magnetic material of Fe-Cu based alloy by use

05530694-050400

of a melting process, since there is a large difference between the solidification points of Fe and Cu, there have occurred such problems as Cu is condensed at the central portion of an alloy ingot when the ingot is made and as the ingot is inferior in workability and particularly in hot-workability due to the separation of the Cu phase with the result of the occurrence of cracks, so that this material is far from the mass production thereof insofar as a method of plastically working the ingot of the material is concerned.

On the other hand, as a method of producing a composite body of different kinds of metals, there is known, as disclosed in "Heat Treatment" Vol.38, No.2, pages 75 to 79, issued in April, 1998, a method of a multilayer metal body, comprising the steps of providing a layered body of different metals, and repeating the rolling of the layered body so that the multilayer metal body may be produced.

In a case of applying this method to the Fe-Cu based alloy, since the sheets of Fe and Cu are stacked, it becomes possible to remove such difficulties in ingot-formability and in workability. Thus, in this multilayer metal body, there occurs such a structure as Fe and Cu are layered with very small intervals, so that the coercivity thereof become somewhat enhanced.

However, in this multilayer metal body, Cu exists in the state of foil, so that it is not sufficient as a semi-hard magnetic material. Of course,

raising a ratio of Cu existing therein makes it possible to raise the coercivity, however, it will lead to the drop of the saturation magnetic flux density thereof.

DISCLOSURE OF THE INVENTION

5 In view of the above-explained problems, the object of the invention is to obtain a method of producing a novel, semi-hard magnetic material, the semi-hard magnetic material produced by the method which material has a superior magnetic characteristic, and a
10 magnetic marker using the semi-hard magnetic material.

 The present inventors have repeated researches of multi-layered metal structure of Fe and Cu in order that a semi-hard magnetic material may be produced from the Fe-Cu multilayer material. As a result thereof, the
15 present inventors found out a surprising phenomenon that, by heating the Fe-Cu multi-layered metal body, Cu layers are agglomerated to become spheres, with the result that the Cu layers is divided into a discrete phase fine in size.

20 Further, the present inventor found out that cold working of the structure having the discrete, fine Cu phase makes the structure anisotropic and leads to raise remarkably the coercivity thereof.

 Namely, according to the first aspect of the
25 invention, there is provided a method of producing a semi-hard magnetic material, comprising the steps of preparing a multilayer body in which both a layer "A"

containing Fe with magnetism as a main constituent thereof and another layer "B" containing non-magnetic metal of the Cu group are stacked, heating the multilayer body so that the layer "B" may be divided into a discrete phase, and performing the cold working thereof.

As regards the dividing treatment, it is preferred to perform the Cu layer-dividing treatment at a holding temperature of 680 to 1085°C for a holding period of time of 10 to 180 minutes.

In the present invention, it is preferred to perform a magnetization steepness-generating heat treatment for enhancing the squareness ratio and the magnetization steepness, and it is preferred to perform the magnetization steepness-generating heat treatment at a holding temperature of 400 to 700°C for a holding period of time of 2 to 120 minutes.

According to the second aspect of the invention, there is provided a method of producing a semi-hard magnetic material which is a sheet having a thickness of 0.03 to 1.0 mm by cold working.

The semi-hard magnetic material of the invention has such a structure as a plurality of layers "B" each including partially divided, strip-like portions of Cu as the main thereof are laminated with the layer "A" being interposed therebetween.

According to the third aspect of the invention, there is provided a magnetic marker produced

by locating the semi-hard magnetic material of the invention so that a bias magnetic field may be applied to the magnetostriction element of the magnetic marker.

BRIEF DESCRIPTION OF THE DRAWINGS

5 Fig.1 is a diagram showing the steps of producing the semi-hard magnetic material of the invention;

 Fig.2 is a photograph showing a micro structure of a comparative semi-hard magnetic material;

10 Fig.3 is a photograph showing a metal structure of a comparative semi-hard magnetic material subjected to a dividing treatment;

 Fig.4 is a photograph of a metal structure of another semi-hard magnetic material of the invention;

15 Fig.5 is a photograph of a metal structure of still another semi-hard magnetic material of the invention;

 Fig.6 is a graph showing the measurement result of the magnetic characteristic regarding a semi-
20 hard magnetic material of the invention;

 Fig.7 is a graph showing the measurement result of the magnetic characteristic regarding another semi-hard magnetic material of the invention;

 Fig.8 is a graph showing the measurement
25 result of the magnetic characteristic regarding still another semi-hard magnetic material of the invention;
and

004050 46902960

Fig.9 is a perspective view showing one example of the structure of a magnetic marker in which a bias material of the invention for the magnetic marker is combined.

5 THE BEST MODE FOR WORKING THE INVENTION

The basic technique of the invention resides in the respect that, by the steps of dividing through the heat treatment the Cu layers of the multilayer body having the stacked layers of Fe and Cu, and cold working
10 to make the structure anisotropic, the properties of the coercivity, squareness ratio and magnetization steepness thereof are enhanced.

The invention is explained in detail below.

In the multilayer body which is a blank in the
15 invention, the layer "A" containing the main component of Fe with magnetism is necessary to keep basic, magnetic characteristics. As the layer "A" containing the main component of Fe with magnetism, it need not be pure iron, and deoxidizing elements, Al and/or Si and/or
20 Mn, may remain in the layer "A" as occasion demands. In addition, corrosion resistive elements, Cr and etc., or C contributing to strength may be contained in the layer "A".

Further, in the invention, as the layer "B",
25 not only pure Cu but also a non-magnetic metal of the Cu group, that is, Cu or Ag or Au may be used in the state of a simple substance or an alloy. These elements are

004050 4690360

hardly dissolved in Fe and exist in the structure as the second phase which impedes the displacement of the magnetic domain walls and/or the rotation of the magnetic domains, whereby these elements have such a function as to enhance the coercivity. Of course, the phase of the non-magnetic metal of the Cu group may contain a slight amount of other components and/or additives dissolved in the non-magnetic metal of the Cu group.

In the Cu group elements, since Cu can be got cheapest, it is most preferred to use Cu.

The multilayer body may be made, for example, by the steps of: stacking alternately both of a metal sheet containing as the main component thereof Fe with magnetism which becomes the layer "A" and another non-magnetic metal sheet of a Cu group element; and bonding the layers to each other by hot, hydrostatic pressing or by hot rolling or by the combination of them, etc. In addition to these steps, cold rolling may be added.

In order to enhance the coercivity, it is preferred to distribute Cu fined in size as small as possible, and it is desired that the non-magnetic metal layer of the Cu group, which is the raw material of the multilayer body, is thinned as thin as possible. For making these possible, there are a method having the steps of stacking a plurality of multilayer bodies each having been previously produced by stacking and thinning, and bonding these, and another method having

the steps of pressing thicknesswise a multilayer body having more, stacked layers.

As regards the regulation of the required coercivity, this regulation is readily performed by changing the combination of the metal sheet containing as the main component thereof Fe having magnetism which metal sheet becomes the layer "A" with the other non-magnetic, Cu group metal sheet which becomes the layer "B", which readiness is one of the features of the invention.

In this case, regarding the non-magnetic Cu group metal sheets which become the layers "B", it is preferred to regulate the ratio of a non-magnetic Cu group metal contained in the multilayer body so that the content thereof may be in the range of 3 to 30 mass %, and more preferably it is in the range of 8 to 20 mass %.

By heating up to a proper temperature the multilayer body obtained by the various methods explained above, in which the layers of both of Fe and a non-magnetic Cu group metal are stacked, each of the layers "B" is divided, which treatment is called "a dividing treatment" in this invention.

The temperature of the dividing treatment is preferably a temperature between the melting point of the non-magnetic Cu group metal and a level lower about 300°C than it, such as 685 to 1085°C, in a case of using Cu as the non-magnetic Cu group metal.

By heating the multilayer body up to this temperature range, it is possible to finely divide the Cu layers. Thus, when the sectional structure of the multilayer body is observed, a plurality of partially divided, sheet-like Cu layers are stacked (, that is, laminated) while interposing therebetween layers "A" having magnetism.

Further, regarding the holding period of time in the dividing treatment, a short period may be adopted in a case where the heating temperature is high. However, since an insufficient period of time does not divide the Cu layers sufficiently, it is preferred to adopt the holding period of time of at least about 10 minutes. Further, since a too long holding period of time impedes the producibility thereof, the holding period of time may be about 180 minutes at most, and more preferably it is in the range of 30 to 60 minutes. Furthermore, if the holding period of time is regulated to be about 5 minutes while preventing the Cu layers from melting and flowing out of the edges of the multilayer body, the multilayer body may be held at a temperature not less than the melting point of Cu, that is, about 1085 to 1200°C.

Then, by cold working the heated body, magnetic anisotropy is applied to the body so that the properties of coercivity, squareness ratio and magnetization steepness can be enhanced. Namely, the divided, non-magnetic Cu group metal layers are

elongated by the plastic working such as rolling or drawing, and it becomes possible to obtain such a structure as longitudinally elongated, non magnetic ranges are dispersed while having a width in a direction vertical to the rolling or drawing direction. By more finely dividing the non-magnetic layers "B", it becomes possible to remarkably enhance the coercivity in comparison with a case where Cu exists as complete sheets.

Further, by this plastic working, it is possible to proceed with the texturing of the matrix containing as the main component thereof Fe having magnetism. By proceed with the applying of the plastic working to the alloy containing as the main component thereof Fe having magnetism, the material become to have a texture. In a case where cold rolling is adopted as the plastic working, the rolling direction becomes $\langle 110 \rangle$ direction, and there occurs the texture of $\{001\} \langle 110 \rangle$ and $\{112\} \langle 110 \rangle$. Also, in the invention, the textures of $\{100\} \langle 110 \rangle$ and $\{112\} \langle 110 \rangle$ is formed regarding the layer "A" having magnetism. Further, since the non-magnetic layers "B" are finely divided by the dividing treatment, the cold rolling applied (as one of the plastic working) to the structure brings about such a structure as a plurality of partially broken, sheet-like layers "B" are stacked in the texture of the matrix containing as the main component thereof Fe having magnetism. The forming of the texture leads to restrict

the kinds of the factors which impede the displacement of the domain walls and/or the rotation of the magnetic domains, so that the displacement of the magnetic domain walls and/or the rotation of the magnetic domains come to occur simultaneously at a certain magnetic field applied thereto. Namely, the squareness ratio and the magnetization steepness are enhanced.

In the semi-hard magnetic material of the invention, it is preferred for the thin sheet to have a thickness of 0.03 to 1.0 mm. By providing this level of thickness, when this material is used as the bias material of a magnetic marker, the magnetic marker can be formed to have a small-size design. Further, it goes without saying that a bar-like or rod-like shape as well as the sheet-like shape may be adopted, however, regarding the cold working, the cold rolling is superior to other processes such as drawing and etc. in respect of the productivity. Regarding the thickness of the material, the thinner the thickness of the material, the more readily the small design of the magnetic marker becomes possible, although it depends on the magnitude of an intended bias magnetic field and on the usage thereof.

In addition, in the present invention, by performing an steepness-affording heat treatment for enhancing the squareness ratio and the magnetization steepness by heating the material after the cold plastic working, it becomes possible to further improve the

004050-4690550
0530694-050400

magnetic characteristics. This heat treatment is usually called "an aging treatment". In a case where there are much strain by the plastic working remains in the material, the displacement of the magnetic domain walls and the rotation of the magnetic domains in the matrix come to be impeded although the matrix containing Fe as the main component thereof inherently has superior soft magnetism. In this state of the semi-hard magnetic material, the squareness thereof becomes small and the shape of the B-H curve becomes gently-sloping, that is, the squareness and the magnetization steepness of the material are inferior.

Thus, by the aging treatment, the strain of the matrix can be relieved, so that the displacement of the magnetic domain walls and/or the rotation of the magnetic domains may be easy, and the main factors impeding the displacement of magnetic domain walls and/or the rotation of the magnetic domains may be limited to the non-magnetic Cu group metal dispersed in the material, whereby it becomes possible to obtain such a semi-hard magnetic material as to have enhanced squareness ratio and a B-H curve approaching a rectangular shape (, that is, good magnetization steepness). Thus, in the invention, the aging treatment is called "steepness-affording heat treatment" in view of the meaning that the aging treatment brings about enhanced magnetization steepness.

The magnetization steepness is a particularly

important factor as one of the characteristics required in the magnetic marker, and the ratio of Br/B_{8k} is preferred to be not less than 80% (, in which the Br is residual, saturation magnetic flux density, and in which the B_{8k} is magnetic flux density in the magnetic field of 8000A/m). The holding temperature of the steepness-affording heat treatment is preferred to be in a range of 400 to 700°C. In a case where the holding temperature is too low, it become impossible to sufficiently relieve the strain of the matrix having magnetism. Thus, the more preferable holding temperature is in a range not less than 450°C. In another case where the holding temperature is too high, the divided, non-magnetic Cu group metal layers agglomerate each other to become coarse in size, with the result that there occurs such a fear as the effect of impeding the displacement of the magnetic domain walls and/or the rotation of the magnetic domains can not be obtained sufficiently. Thus, the more preferable holding temperature is in a range of 450 to 600°C.

The holding period of time for the steepness-affording heat treatment is preferred to be in a range of 2 to 120 minutes. In a case where the holding period of time is too short, it becomes impossible to sufficiently relieve the strain of the matrix having magnetism. Thus, the more preferred holding period of time is not less than 3 minutes. However, in another case where the holding period of time is too long, the divided, non-

magnetic layers "B" agglomerate each other to become coarse in size, with the result that there occurs such a fear as the effect of impeding the displacement of the magnetic domain walls and/or the rotation of the

5 magnetic domains can not be obtained sufficiently.

Further, in view of the productivity, the holding period of time is preferred to be as short as possible. Thus, the more preferred, holding period of time is not more than 60 minutes.

10 By use of the above explained method, the semi-hard magnetic material comes to have such a structure as, when viewed the sectional structure thereof, a plurality of partially divided, sheet-like layers "B" including as the main component thereof Cu
15 are stacked each other through the layers "A" including as the main component thereof Fe having magnetism. One specific example thereof is a metal structure shown in Fig.4. This semi-hard magnetic material is superior in the squareness ratio and the magnetization steepness,
20 and particularly it becomes a material preferred as a bias material for a magnetic marker. That is, the semi-hard magnetic material of the invention is combined, as a bias element (7), with a magnetostrictive element (9), for example as shown in Fig.9, so that a magnetic marker
25 is produced.

As one specific example, the magnetostrictive element is regulated to have a thickness of 0.03mm, a width of 6 mm and a length of 38 mm, and the bias

004050-45900000

element (7) is regulated to have a thickness of 0.05 mm, a width of 6 mm and a length of 32 mm so that an intended bias magnetic field may be applied to this magnetostriction element. The bias element (7) is then backed with resin or is interposed between resin sheets so that a pack (8) may be formed, which pack (8) is located in the vicinity of the magnetostriction element (9) made of an amorphous material and is sealed in a plastic case (10) comprising an upper lid provided with a recess and a lower lid, whereby the magnetic marker is formed. As the magnetostriction element, it is necessary to select, in compliance with magnetic field obtained in the semi-hard magnetic material, the amorphous alloy and etc. disclosed in U.S. Patent No.5,628,840. Further, although in this example the bias element and the magnetic marker both having a sheet shape are disclosed, a bar-like or column-like shape may be used.

(Embodiments)

20 The basic steps of the method for producing the semi-hard magnetic material of the invention is shown in Fig.1.

25 Electromagnetic, mild iron thin sheets and oxygen-free copper sheets were stacked to thereby provide a composite material including 13% Cu in terms of mass ratio, the composite material being then hot-rolled to provide a rolled product. A plurality of

rolled products were then stacked and hot-rolled, whereby a multilayer body (1) was obtained which was used as the blank of the invention having a thickness of 3 mm and a layered, sectional structure as shown in Fig.2. In Fig.2, it is observed that the layers each appearing to be black in color and each containing as the main component thereof Fe having magnetism and the other layers each appearing to be white in color and each containing as the main component thereof Cu are stacked and alternated with each other. The number of those layers was about 1500.

To this blank of the multilayer body (1) was applied a dividing treatment (2) of 800 to 1075°C and 60 to 180 minutes, whereby each of the Cu layers was divided. Figs. 3A to 3D show one example thereof, in which a dividing treatment of 800°C and 60 minutes was applied. Each of Figs. 3A and 3B is a sectional structure taken in a rolling longitudinal direction, each of Figs. 3C and 3D being a sectional structure taken in a rolling width direction. It is confirmed in the photographs that, in both of the longitudinal direction and the width direction, each of the Cu layers are divided at places. After the dividing treatment, cold rolling (3) was afforded as the plastic working, whereby there were obtained semi-hard magnetic materials having various thickness. Further, some of the semi-hard magnetic materials were subjected to the softening annealing (4) of 800°C and 30 to 60 minutes after the

cold rolling (3). Even by this softening annealing, the dividing of the Cu layers can be expected. After that, cold rolling (5) is performed as the cold working, whereby semi-hard magnetic material of various thickness were obtained.

From these resultant semi-hard magnetic materials, there were cut off samples for measuring magnetic characteristics (Nos. 1 to 10). Further, the steepness-affording heat treatment (6) was applied to other samples, and the magnetic characteristics thereof after the steepness-affording treatment were measured (Nos. 11 to 20).

The treatment applied to each of the samples and the measurement results of the magnetic characteristics are shown in Tables 1 and 2, respectively. As one of the measurement results, the B-H curve of the sample No. 7 is shown in Fig.7, and the B-H curve of the sample No. 17 is shown in Fig.8. The magnetic characteristics of the multilayer body (1) used as the blank thereof was also measured as comparative sample No.21, the measurement result thereof being shown in Table 2, and the B-H curve thereof is shown in Fig.6.

Table 1

sam- ple No.	dividing treatment		cold roll- ing	softening annealing (dividing treatment)		cold roll- ing	steepness- affording heat treatment	
	°C	min- utes	%	°C	min- utes	%	°C	min- utes
1	1075	60	-	-	-	80	-	-
2	1075	60	-	-	-	96	-	-
3	1075	60	80	800	30	88	-	-
4	800	60	-	-	-	80	-	-
5	800	60	-	-	-	98	-	-
6	800	60	73	800	30	93	-	-
7	800	60	80	800	30	91	-	-
8	800	180	-	-	-	80	-	-
9	800	180	-	-	-	98	-	-
10	800	180	80	800	30	91	-	-
11	1075	60	-	-	-	80	500	30
12	1075	60	-	-	-	96	500	30
13	1075	60	80	800	30	88	500	30
14	800	60	-	-	-	80	500	30
15	800	60	-	-	-	98	500	30
16	800	60	73	800	30	93	500	30
17	800	60	80	800	30	91	500	30
18	800	180	-	-	-	80	500	30
19	800	180	-	-	-	98	500	30
20	800	180	80	800	30	91	500	30
21	-	-	-	-	-	-	-	-

004050"4690E360

Table 2

sample No.	coercivity (A/m)	residual magnetic flux density Br (T)	magnetic flux density B _{8k} (T)	squareness Br/B _{8k} (%)	remarks
1	1360	1.45	1.64	88.4	the invention
2	1320	1.42	1.70	83.5	the invention
3	1520	1.44	1.71	84.2	the invention
4	960	1.23	1.53	80.3	the invention
5	1400	1.34	1.63	82.2	the invention
6	1280	1.35	1.60	84.4	the invention
7	1320	1.32	1.59	83.0	the invention
8	960	1.24	1.53	81.0	the invention
9	1200	1.40	1.67	83.8	the invention
10	1240	1.37	1.60	85.6	the invention
11	1480	1.45	1.62	89.5	the invention
12	1600	1.45	1.64	88.4	the invention
13	2040	1.47	1.66	88.6	the invention
14	840	1.30	1.56	83.3	the invention
15	1440	1.41	1.62	87.0	the invention
16	1536	1.37	1.58	86.7	the invention
17	1480	1.36	1.58	86.1	the invention
18	800	1.27	1.53	83.0	the invention
19	1376	1.36	1.58	86.1	the invention
20	1440	1.37	1.58	86.7	the invention
21	1360	1.20	1.51	78.4	comparative material

004050-1690E560

As shown in Table 2, it is apparent that, in each of Sample Nos. 1 to 20 of the semi-hard magnetic materials according to the invention, higher squareness is obtained in comparison with the comparative sample No.21. Also, the B_r/B_{8k} values of most of the samples of this invention exceed 80%, and some exceed 85%, and it is apparent that these samples have semi-hard magnetism preferred as the bias material of a magnetic marker. Further, in comparison with the gently curved B-H curve of the comparative sample No. 21 shown in Fig.8, the B-H curve shown in Fig.6 relating to the sample No. 7 of the semi-hard magnetic material according to the invention approaches a rectangular shape, and it is apparent that it has superior magnetization steepness. In addition, in comparison with the B-H curve of the sample No.7 shown in Fig.6, the B-H curve of the sample No. 17 shown in Fig.7 has a shape more like a rectangle, and it is apparent that the magnetization steepness is greatly improved by the steepness-affording heat treatment.

The microstructure of the semi-hard magnetic material of the invention was observed by an electron microscope. Some of the microstructure thereof are shown in Figs. 4A to 4C and Figs. 5A to 5C. Figs.3A to 3D are the microstructures of the semi-hard magnetic material of the invention, wherein Fig.3A is the microstructure of a section taken longitudinally in a rolling direction, and Figs. 3B and 3C are the

microstructures of sections taken transversely in the rolling direction. In each of the microstructures, it is found that, in the matrix of a dark color containing as the main component thereof Fe having magnetism, each of the layers "B" is divided which contains Cu as the main component thereof, the Cu phase being dispersed in the shape of strings or dots of white color, and that the multitudinous partially divided, sheet-like layers "B" containing Cu as the main component thereof are stacked through the layers "A" containing as the main component thereof Fe having magnetism. In these photographs, the lateral direction of each of Figs. 3A, 4A and 5A is the longitudinal direction of the cold rolling, and the Cu phase is shown to be strings extending in this lateral direction. In each of Figs. 3B, 3C, 4B, 4C, 5B and 5C, it is clearly shown that the layers each containing Cu as the main component thereof are divided. Thus, the Cu phase is actually in a sheet-like shape and is extended in the longitudinal direction of the cold rolling while being dispersed in the matrix containing as the main component thereof Fe having magnetism. Namely, the semi-hard magnetic material of the invention is provided, when viewing the sectional structure thereof, with such a structure as the multiple partially divided, sheet-like layers "B" containing a Cu group non-magnetic metal as the main component thereof are stacked through the layers "A" containing as the main component thereof Fe having magnetism.

Figs. 5A to 5C are the microstructures of Sample No. 17 of the semi-hard magnetic material according to the invention. Fig.5A is the microstructure of the longitudinal section taken in the rolling direction, and Fig.5B and 5C are the microstructures of the transverse sections taken widthwise of the rolling direction. From these structures, it is found that granular Cu phase exists among the partially divided layers containing Cu as the main component thereof. The granular Cu is brought about from the steepness-affording heat treatment, which is deemed to be a factor of the increment of coercivity brought about after the steepness-affording heat treatment.

POSSIBILITY OF INDUSTRIAL USE

According to the production method of the invention, it becomes possible to obtain the semi-hard magnetic material having superior squareness and superior magnetization steepness and to obtain the bias material for the magnetic marker which bias material is the material of the bias element combined with the magnetostrictive element for the magnetic marker, without causing such problems as Cu agglomerates in the center portion of an alloy ingot when making the ingot by use of a conventional melting method and as the hot workability is particularly deteriorated due to the separation of Cu phase.

WHAT IS CLAIMED IS

1. A method of producing a semi-hard magnetic material, comprising the steps of: preparing a multilayer body in which layers "A" each containing as
5 the main component thereof Fe having magnetism and layers "B" each containing a non-magnetic Cu group metal as the main component thereof are stacked each other; heating the multilayer body so that the layers "B" are subjected to a dividing treatment; and applying a cold
10 plastic working to the multilayer body.
2. A method of producing the semi-hard magnetic material according to claim 1, wherein the dividing treatment is performed at a holding temperature of 685 to 1085°C for a holding period of time of 10 to 180
15 minutes.
3. A method of producing the semi-hard magnetic material according to any one of claims 1 and 2, further comprising the step of performing an steepness-affording heat treatment so that squareness ratio and magneti-
20 zation steepness are enhanced by heating the multilayer body.
4. A method of producing the semi-hard magnetic material according to claim 3, wherein the steepness-affording heat treatment for enhancing the squareness
25 ratio and the magnetization steepness by use of the heating is performed at a holding temperature of 400 to 700°C for a holding period of time of 2 to 120 minutes.
5. A method of producing the semi-hard magnetic

004050-4590550

material according to claim1, further comprising the step of performing cold working so that the multilayer body becomes a thin sheet having a thickness of 0.03 to 1.0 mm.

5 6. A semi-hard magnetic material having a structure in which layers "A" each containing as the main component thereof Fe having magnetism and layers "B" each containing a non-magnetic Cu group metal as the main component thereof are stacked each other, each of
10 said layers "B" being provided with a shape of sheet partially divided.

7. A magnetic marker having the semi-hard magnetic material according to claim 6, said semi-hard magnetic material is located so that a bias magnetic
15 field is applied to a magnetostrictive element used for said magnetic marker.

004050"4690E560

ABSTRACT

05530654-050400

The invention relates to a semi-hard magnetic material having rectangular hysteresis loop and superior magnetization steepness and a method of producing a bias material preferably used for a magnetic marker. This method comprises the steps of preparing a multilayer clad material in which layers "A" each containing Fe as the main component thereof and layers "B" containing as the main component thereof a Cu group metal are diffusion-bonded, heating the multilayer clad material, subjecting the material to a dividing treatment, and applying cold working thereto. By this method, it becomes possible to obtain the semi-hard magnetic material having high squareness ratio and superior magnetization steepness, and to obtain the bias material for the magnetic marker.

FIG. 1


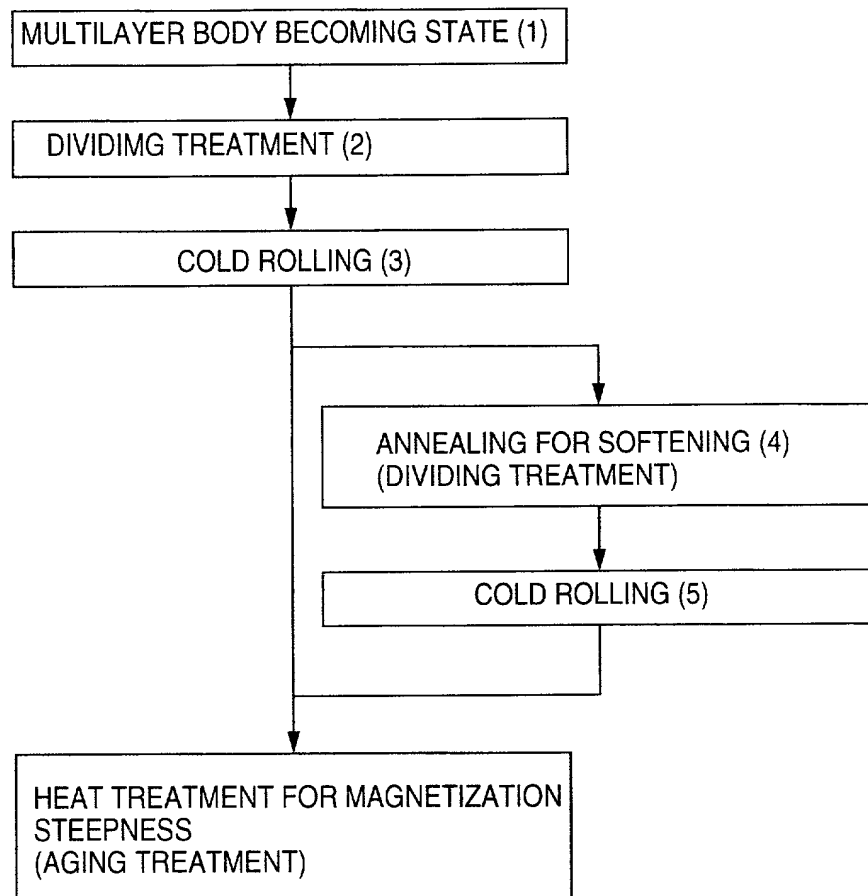


FIG. 2

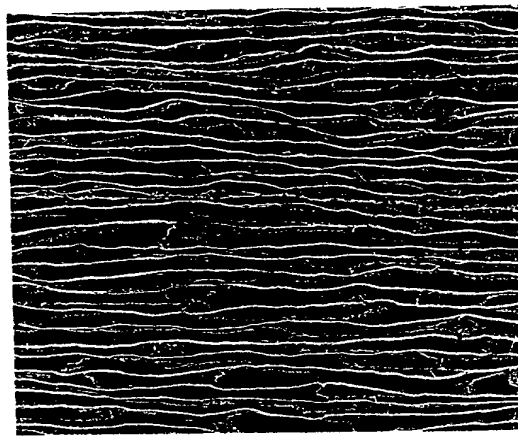METAL STRUCTURE OF COMPARATIVE SAMPLE No.21



100 μm

FIG. 3

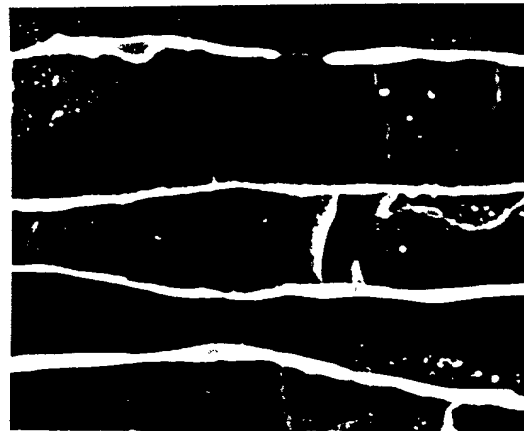
METAL STRUCTURE OF ONES EACH SUBJECTED TO
DIVIDING TREATMENT

(A)




50 μm

(B)




10 μm

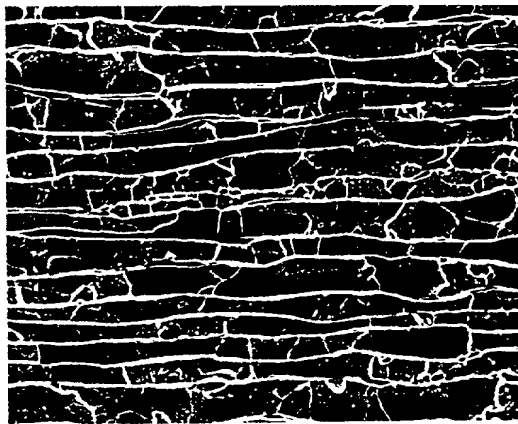(C)



50 μm

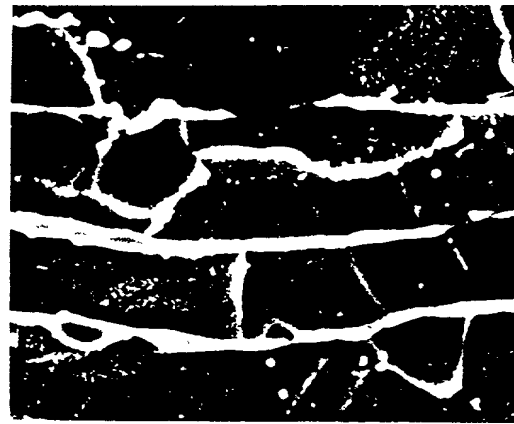(D)




10 μm

FIG. 4


METAL STRUCTURE OF SAMPLE No.7 OF THE INVENTION

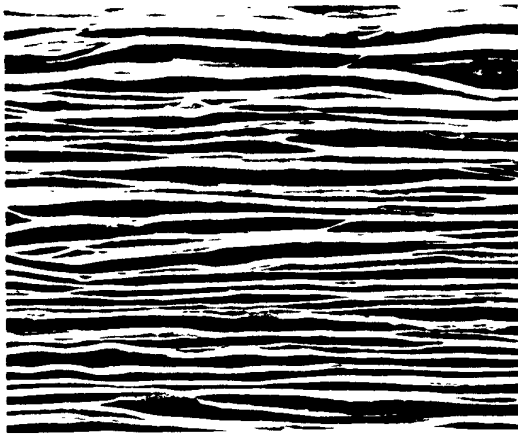(A)



10 μm

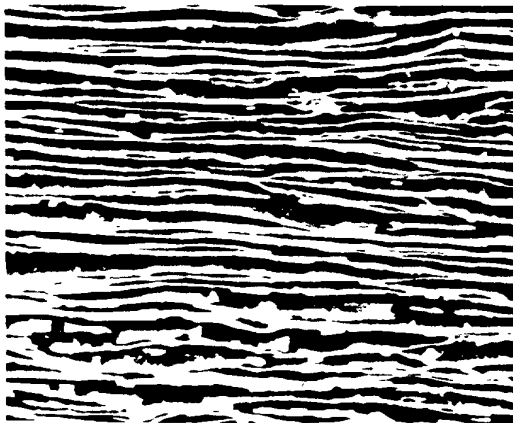(B)



10 μm

(C)



5 μm

FIG. 6


RESULT OF MEASURING MAGNETIC CHARACTERISTIC
REGARDING No.7 OF THE INVENTION

FIG. 7


RESULT OF MEASURING MAGNETIC CHARACTERISTIC
REGARDING No.17 OF THE INVENTION

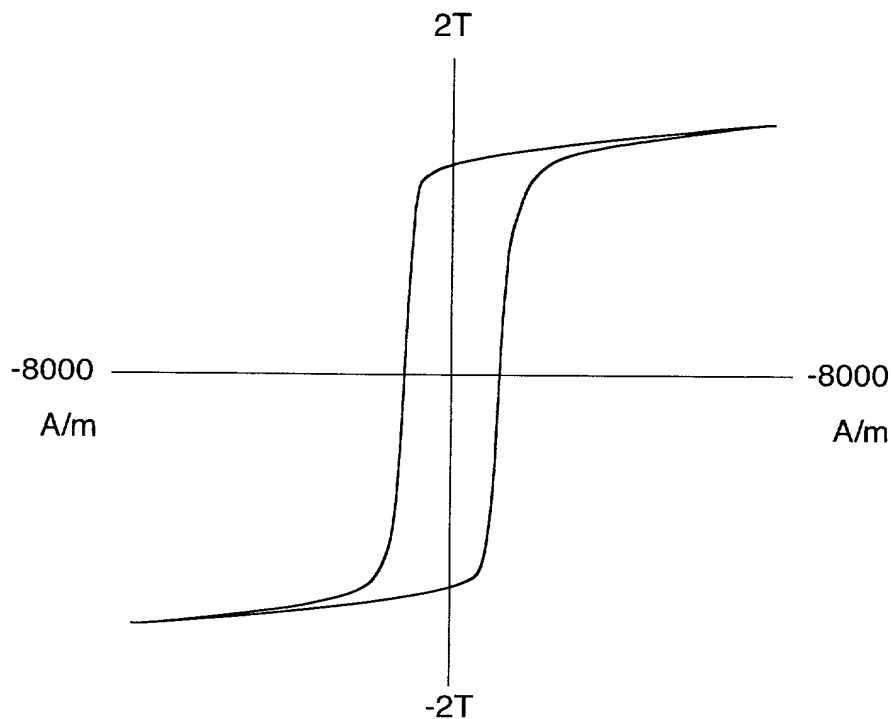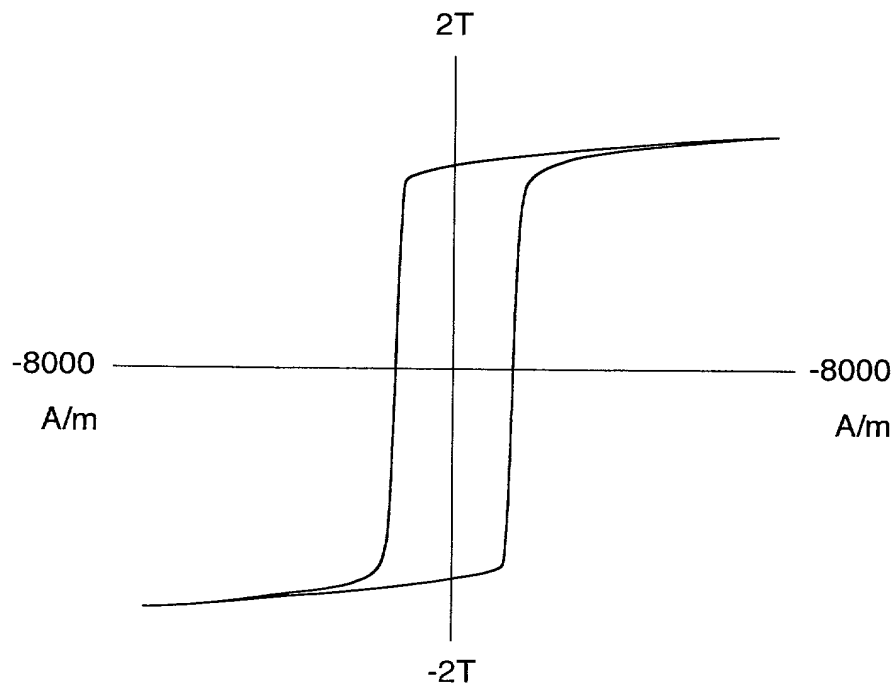FIG. 8

RESULT OF MEASURING MAGNETIC CHARACTERISTIC
REGARDING No.21 OF THE INVENTION


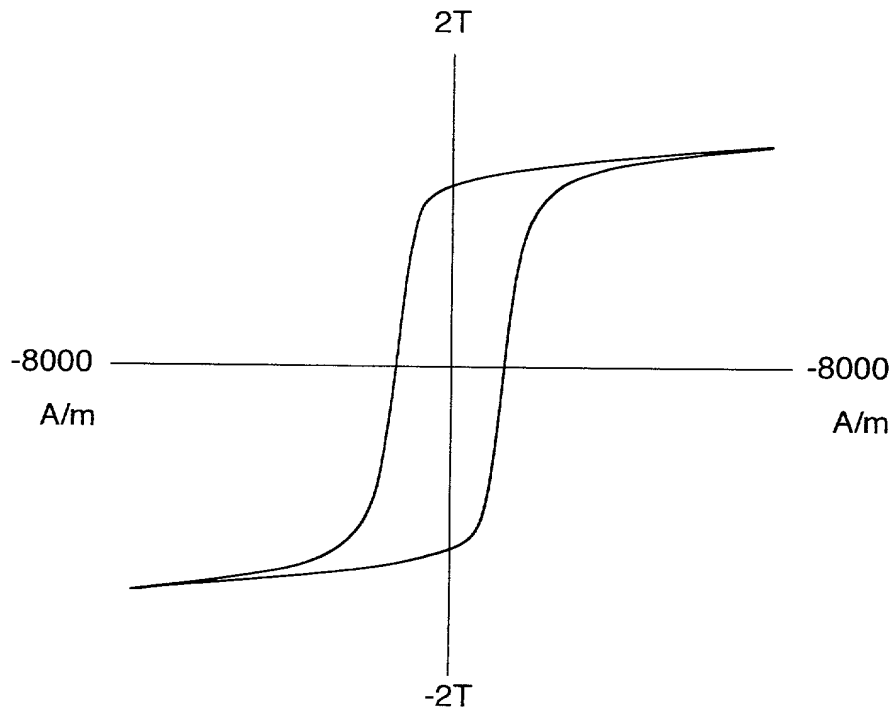


FIG. 9
MAGNETIC MARKER

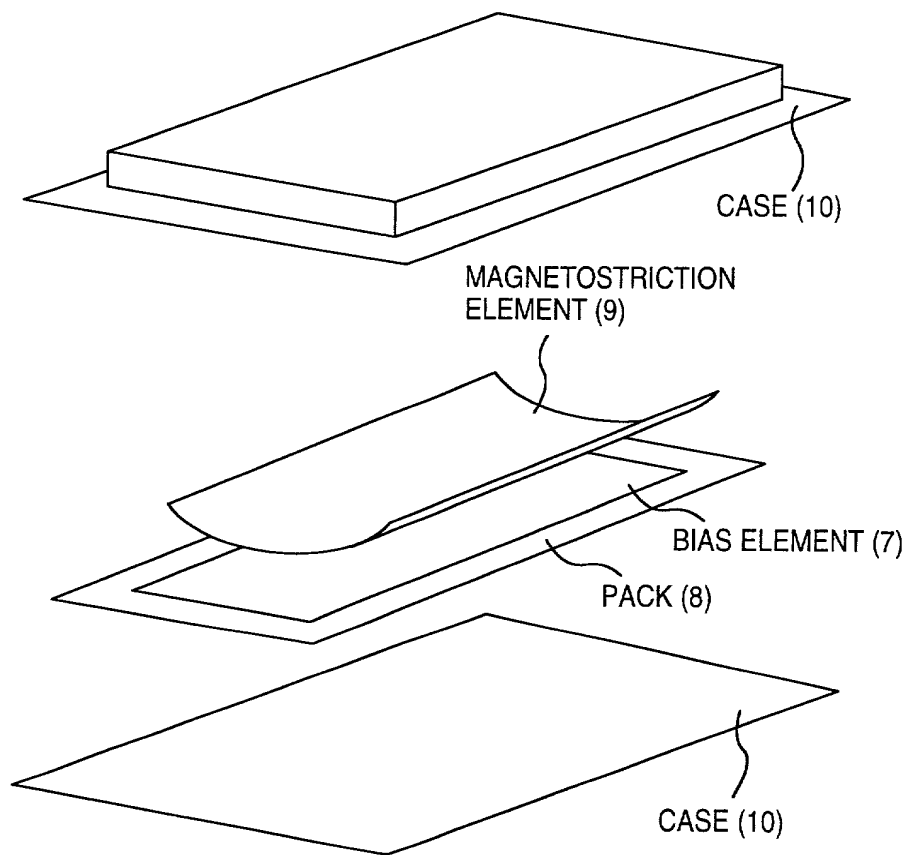

ATTN: BOX MISSII

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of

Noriyuki NAKAOKA, Akira KAWAKAMI and Hideya YAMADA

Serial No.: NOT YET ASSIGNED

Filed: May 4, 2000

For: SEMI-HARD MAGNETIC MATERIAL, METHOD OF PRODUCING SAME, AND MAGNETIC MARKER
USING SAME

PETITION FOR ACCEPTANCE OF BLACK AND WHITE PHOTOGRAPHS UNDER 37 C.F.R. § 1.84

BOX MISSING PARTS

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

RECEIVED

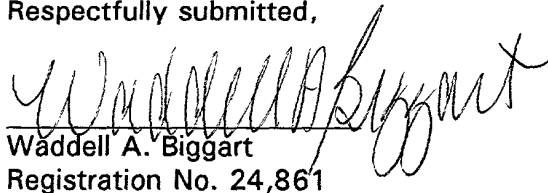
06 JUN 2000

Internal Distribution


Applicants hereby petition for acceptance of the attached photographs under the provisions of 37 C.F.R. § 1.84. In compliance with the provisions of 37 C.F.R. § 1.84, submitted herewith is one copy of FIG. 2, FIGS. 3(A)-3(D), FIGS. 4(A)-4(C) and FIGS. 5(A)-5(B).

A check for the requisite fee under 37 C.F.R. § 1.17(h) of \$ 130.00 is also attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Respectfully submitted,


Waddell A. Biggart
Registration No. 24,861

SUGHRUE, MION, ZINN, MACPEAK & SEAS
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3202
Tel: (202) 293-7060
WAB/amt
Q58984
Date: May 4, 2000

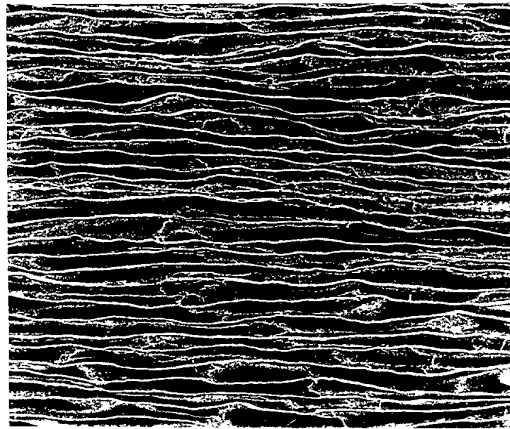FIG. 2**METAL STRUCTURE OF COMPARATIVE SAMPLE No.21**

100 μm

FIG. 3

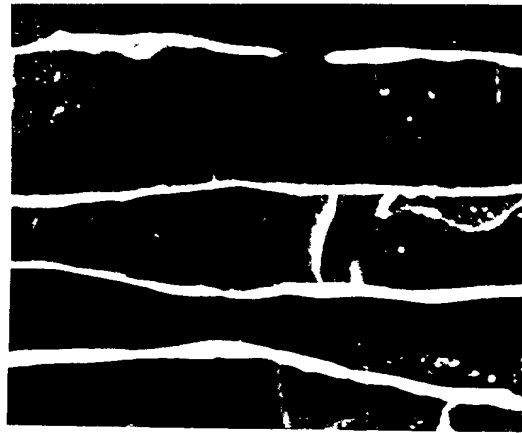
METAL STRUCTURE OF ONES EACH SUBJECTED TO
DIVIDING TREATMENT

(A)



50 μm

(B)



10 μm

(C)



50 μm

(D)



10 μm

FIG. 4

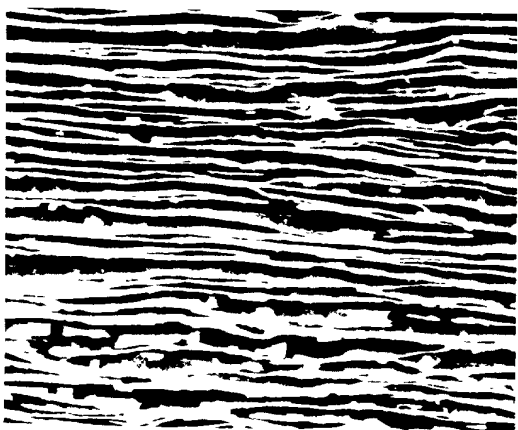
METAL STRUCTURE OF SAMPLE No.7 OF THE INVENTION

(A)



10 μm

(B)



10 μm

(C)




5 μm

FIG. 5


METAL STRUCTURE OF SAMPLE No.17 OF THE INVENTION

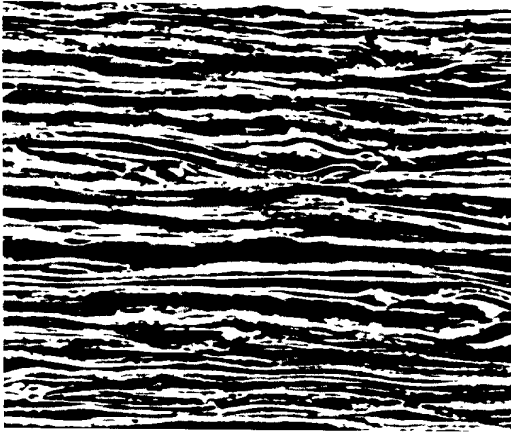(A)




10 μm

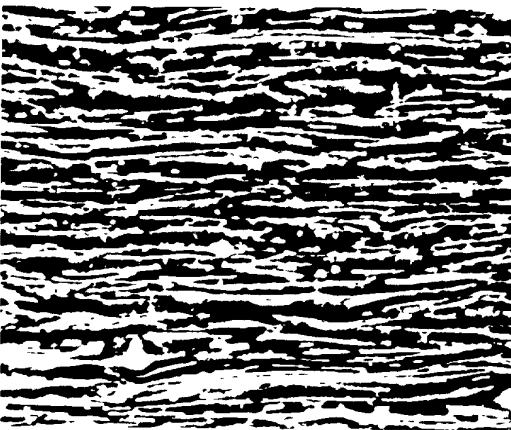(B)



10 μm

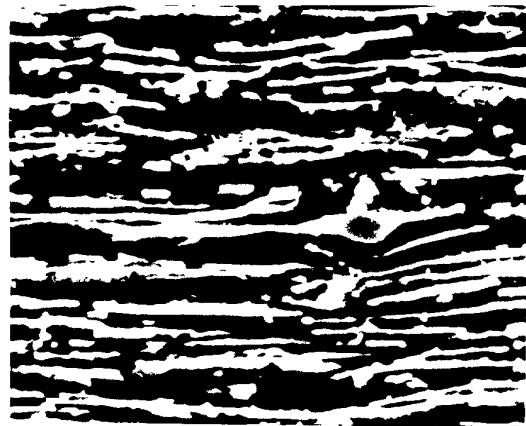(C)



5 μm

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name: that I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought in the application entitled:

"SEMI-HARD MAGNETIC MATERIAL, METHOD OF PRODUCING SAME,
AND MAGNETIC MARKER USING SAME"

which application is:

the attached application
(for original application)

X application Serial No. PCT/JP99/04926
filed Sep. 10, 1999, and amended on

(for declaration not accompanying application)

that I have reviewed and understand the contents of the specification of the above-identified application, including the claims, as amended by any amendment referred to above; that I acknowledge my duty to disclose information of which I am aware which is material to the patentability of this application under 37 C.F.R. 1.56, that I hereby claim foreign priority benefits under Title 35, United States Code §119, §172 or §365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified on said list any foreign application for patent or inventor's certificate on this invention having a filing date before that of the application on which priority is claimed:

Application Number	Country	Filing Date	Priority Claimed (yes or no)
10-257180	Japan	10 September, 1998	yes

I hereby claim the benefit of Title 35, United States Code §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in a listed prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge my duty to disclose any information material to the patentability of this application under 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Serial No.

Filing Date

Status
(patented, pending, abandoned)

I hereby appoint John H. Mion, Reg. No. 18,879; Donald E. Zinn, Reg. No. 19,046; Thomas J. Macpeak, Reg. No. 19,292; Robert J. Seas, Jr., Reg. No. 21,092; Darryl Mexic, Reg. No. 23,063; Robert V. Sloan, Reg. No. 22,775; Peter D. Olexy, Reg. No. 24,513; L. Frank Osha, Reg. No. 24,625; Waddell A. Biggart, Reg. No. 24,861; Robert G. McMorro, Reg. No. 19,093; Louis Gubinsky, Reg. No. 24,835; Neil B. Siegel, Reg. No. 25,200; David J. Cushing, Reg. No. 28,703; John R. Inge, Reg. No. 26,916; Joseph J. Ruch, Jr., Reg. No. 26,577; Sheldon I. Landsman, Reg. No. 25,430; Richard C. Turner, Reg. No. 29,710; Howard L. Bernstein, Reg. No. 25,665; Alan J. Kasper, Reg. No. 25,426; Kenneth J. Burchfiel, Reg. No. 31,333; Gordon Kit, Reg. No. 30,764; Susan J. Mack, Reg. No. 30,951; Frank L. Bernstein, Reg. No. 31,484; Mark Boland, Reg. No. 32,197; William H. Mandir, Reg. No. 32,156; Scott M. Daniels, Reg. No. 32,562; Brian W. Hannon, Reg. No. 32,778 and Abraham J. Rosner, Reg. No. 33,276, my attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and request that all correspondence about the application be addressed to SUGHRUE, MION, ZINN, MACPEAK & SEAS, 2100 Pennsylvania Avenue, N.W., Washington, D.C. 20037-3202.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Date April 12, 2000

First Inventor Noriyuki NAKAOKA

First Name

XXXXXX

Last Name

Residence Yasugi-shi, Japan

Signature

Noriyuki

Nakaoka

Post Office Address 2146, Yasugicho, Yasugi-shi,

Citizenship Japan

Japan.

2-11 Date April 12, 2000

Residence Matsue-shi, Japan

Citizenship Japan

Second Inventor Akira KAWAKAMI

First Name

~~XXXX XXXX~~

Last Name

Signature Akira Kawakami

Post Office Address 655-4, Nishikawatsucho,

Matsue-shi, Japan. J

3-11 Date April 12, 2000

Residence Yasugi-shi, Japan ~~73X~~

Citizenship Japan

Third Inventor Hideya YAMADA

First Name

~~XXXX XXXX~~

Last Name

Signature Hideya Yamada

Post Office Address 720, Yasugicho, Yasugi-shi,

Japan.

Date _____

Residence _____

Citizenship _____

Fourth Inventor _____

First Name

Middle Initial

Last Name

Signature _____

Post Office Address _____

Date _____

Residence _____

Citizenship _____

Fifth Inventor _____

First Name

Middle Initial

Last Name

Signature _____

Post Office Address _____

Date _____

Residence _____

Citizenship _____

Sixth Inventor _____

First Name

Middle Initial

Last Name

Signature _____

Post Office Address _____

Date _____

Residence _____

Citizenship _____

Seventh Inventor _____

First Name

Middle Initial

Last Name

Signature _____

Post Office Address _____